


SPINAL CORD SHEATH and MIS-SPLIT REMOVER

Model SHC 165G

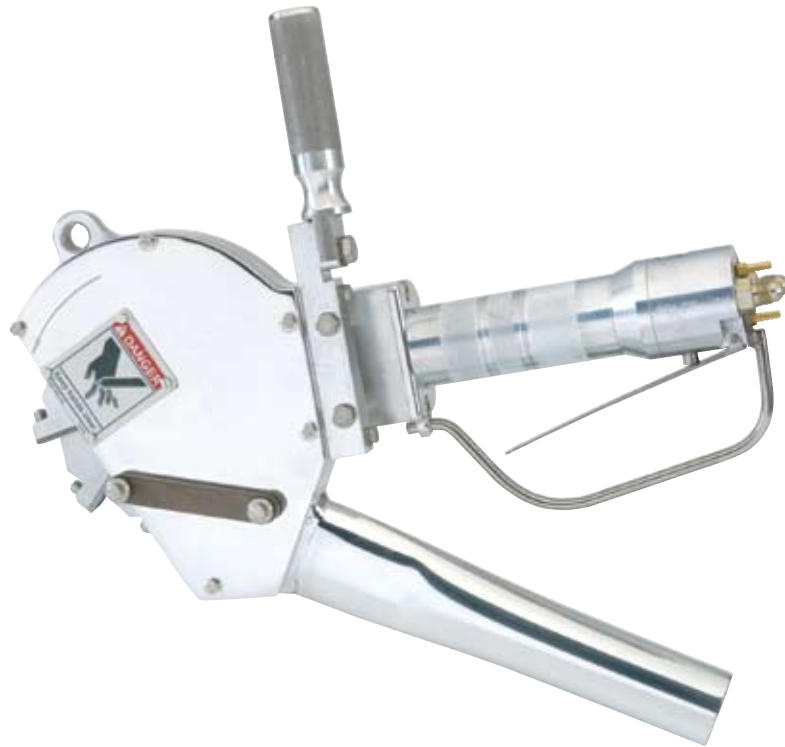


U.S. Patents
6,805, 696
6,511,483
European Patent No.
EP 0 890 313 B1

**The Jarvis Model SHC 165G -
spinal cord and mis-split remover for beef
or pork.**

JARVIS

- Latest patented technology for grinding away BSE risk material, including the spinal cord, which is under the mis-split, and the meninges (spinal cord).
- Connected to a vacuum system that collects removed spinal cord material for disposal.
- Lightweight, powerful (2.5 hp) hydraulic motor - no bogging down or motor icing; low noise and fast blade stop.
- Heavy duty gears made to withstand the extreme conditions found in larger meat processing plants.
- Rugged construction provides unsurpassed durability.
- Meets national and international requirements for hygiene and safety.

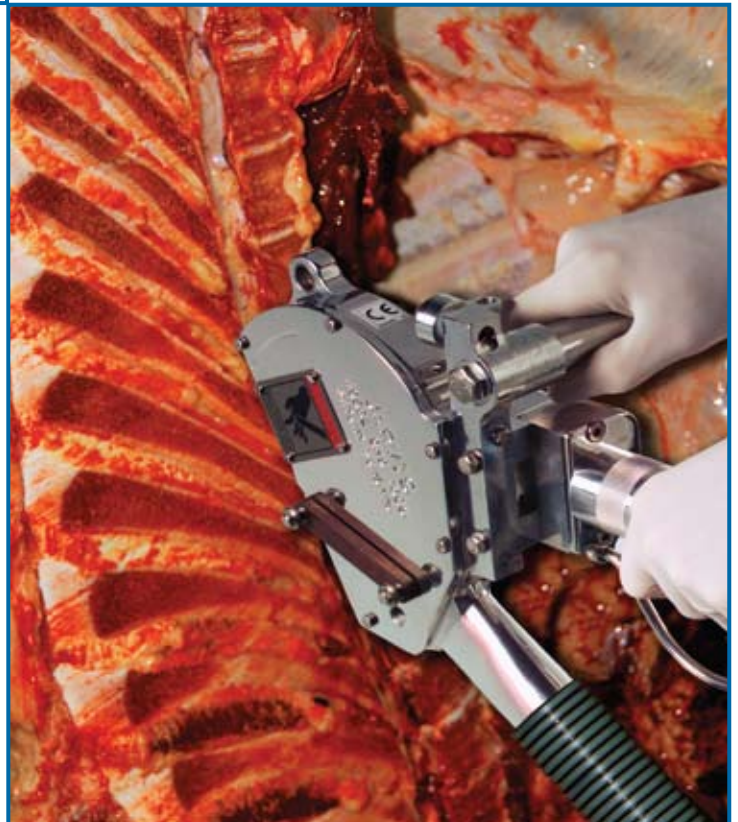

THE SHC SAWS - ULTIMATE POWER, EXCELLENT HANDLING

SPINAL CORD SHEATH and MIS-SPLIT REMOVER

Model SHC 165G

Specifications

Drive	Hydraulic
-------	-----------

Model SHC 165G

Motor Power	2.5 hp	1864 W
Blade Speed at 3.5 gpm		2725 rpm
Control Handle	Dual Anti-Tie Down	Pneumatic
Cutter Head Width		
Pork	0.51 in	13 mm
Beef	0.63 in	16 mm
Cutting Depth (maximum)		
0.51 in / 13 mm wide blade - pork	0.81 in	20.6 mm
0.63 in / 16 mm wide blade - beef	0.88 in	22.4 mm
Vacuum at 14 in Hg (190 in H ₂ O)	320 ft ³ / min	9.06 m ³ / min
Overall Length	15 in	381 mm
Weight	8.6 lbs	3.9 kg
Vibration	less than (<) 100 dB	<0.1 m / sec ²
Noise (one meter from tool)		87 dB

Hydraulic Power Unit

Motor Power	5 hp	3728 W
Operating Voltage	all voltages and 50 Hz available	
Hose Length	16 ft	5 m
Oil Capacity	20 gal	76 L
Oil Viscosity at 100° F / 40° C	200 SUS	46 ISO
Oil Flow Rate	3.5 gal / min	13.2 L / min
Overall Dimensions (l x w x h)		28 x 23 x 28 in 711 x 584 x 711 mm
Weight	225 lbs	102 kg

Equipment Selection and Accessories	Order Number
--	---------------------

Model SHC 165G		
	Complete Tool, 0.51 in / 13 mm wide blade	4007077
	Complete Tool, 0.63 in / 16 mm wide blade	4007089
Hydraulic Power Unit with hydraulic hoses and control box		
	Single Trigger, 460 / 230 V, 3 phase, 60 Hz	4027271
	Single Trigger, 575 V, 3 phase, 60 Hz	4027283
	Dual Trigger, 460 / 230 V, 3 phase, 60 Hz	4027273
	Single Trigger, 440 / 415 / 380 / 220 V, 50 Hz	4027274
	Dual Trigger, 440 / 415 / 380 / 220 V, 3 phase, 50 Hz	4027264
Blade Insert Holders		
	0.51 in / 13 mm blade insert holder	1023549
	0.63 in / 16 mm blade insert holder	1023550
Blade Inserts		
	0.51 in / 13 mm insert	1023535
	0.63 in / 16 mm insert	1023545
Balancer		
		4042044



Products for the meat and poultry industry