


The Jarvis Model 50G hydraulic powered guillotine style dehorner.

- Cuts all types of beef horns closer to the skull than traditional shear type dehorners.
- 1.5 second cycle for high speed production.
- Eliminates difficulties associated with over the head hide pulling.
- Optional clamshell blades yield an even deeper cut, completely under the horn ideal for the U. S. second cut.
- Best possible hygiene with updated, virtually all stainless steel construction minimal corrosion problems.
- Robust construction for long trouble-free life.
- Anti-tie down controls for operator safety.
- Meets national and international requirements for safety and hygiene.
- All polished stainless steel construction.
- Three different blade sizes to best suit the job.
- All stainless steel construction for maximum hygiene.



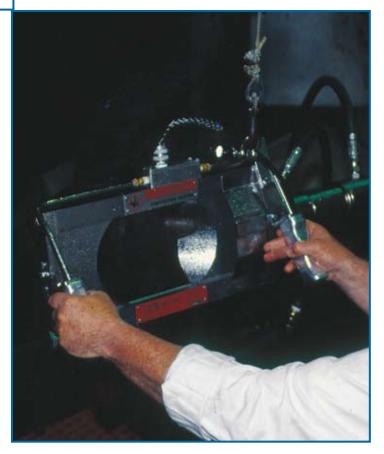

HORN REMOVAL - DIRECTLY ON THE SKULL

BEEF DEHORNER Model 50G

| Specifications | | | | |
|--|------------------------------------|--|------------------------|----------------------|
| Drive | | | | Hydraulic |
| Model 50G | | | | |
| Cutting Force | | | 9900 lb- | |
| Cutting Cycle Time | | with 4027 | | |
| Control Handles | | with 4027 | | |
| | Electric | or Pneumatic Dua | n 12 V | |
| Blade Opening | | 5.5 x 6.0 in | | n 140 x 152 mm |
| Overall Length | | | | n 762 mm |
| Weight | | 65 I | | s 29.5 kg |
| Hydraulic Power Unit | t | | | |
| Motor Power | with 402 | 27044 power unit | 10 h | o 7457 W |
| Motor Power | with 402 | 27088 power unit | 10 h | o 7457 W |
| Operating Voltage | | | 230 V, 3 phase, 60 Hz | |
| | | | es and 50 Hz available | |
| Hose Length | | | 16 1 | t 4.9 m |
| Oil Capacity | | | 30 ga | l 114 L |
| Oil Viscosity at 100 ⁰ F / 40 ⁰ C | | | 200 SUS | 6 46 ISO |
| Overall Dimensions (I x w x h) | | | 38 x 28 x 33 i | n 965 x 711 x 838 mm |
| Weight (without oil) | | | 380 lb | s 172 kg |
| Equipment Selection | Selection and Accessories Order Nu | | | Order Number |
| Model 50G | | | | |
| Electric Triggers | S | v | vith cup blade | s 4025047 |
| | | | h offset blade | |
| Air Triggers | | - | vith cup blade | |
| | | | h offset blade | |
| Hydraulic Power Unit v | with hydraulio | c hoses and conti | rol cable | |
| Electric Triggers | s (1.5 sec) | 460 / 230 V, 3 | 3 phase, 60 Hz | * 4027044 |
| Air Triggers (1.5 | 5 sec) | 460 / 230 V, 3 | 3 phase, 60 Hz | * 4027088 |
| Balancer | | | | 4042039 |
| Blades | | | | |
| Cup Blade Set (includes two 1023259 cup blades, fixed or moving) | | | | , |
| | | ring Blade - Flat (* d Blado – Sharp (* | | |
| | Unset Fixed | d Blade - Sharp (| r each per too |) 1023131 |

* For other configurations: please specify voltage, hertz and intended country of operation when ordering.

| Products for the mea | t and poultry | industry |
|----------------------|---------------|----------|
|----------------------|---------------|----------|

Jarvis Products Corporation · 33 Anderson Road · Middletown, CT 06457-4926 · United States of America Telephone (860) 347-7271 · Fax (860) 347-9905 · sales@jarvisproducts.com · www.jarvisproducts.com