

PNEUMATIC STUNNER

Model USSS-1




U.S. Patent No. 6,135,871

The Jarvis Model USSS-1 - pneumatically operated high speed captive bolt stunner for cattle.

JARVIS®

- Renders stunned animal insensible to pain.
- One shot humane stunning procedure.
- Better stunning for improved meat quality.
- Air operated with no air injection.
- Easy to handle and operate - low recoil or kick back - less operator fatigue.
- Easy to repair and clean.
- Light weight - tool only weights 32.5 pounds (14.7 kg).

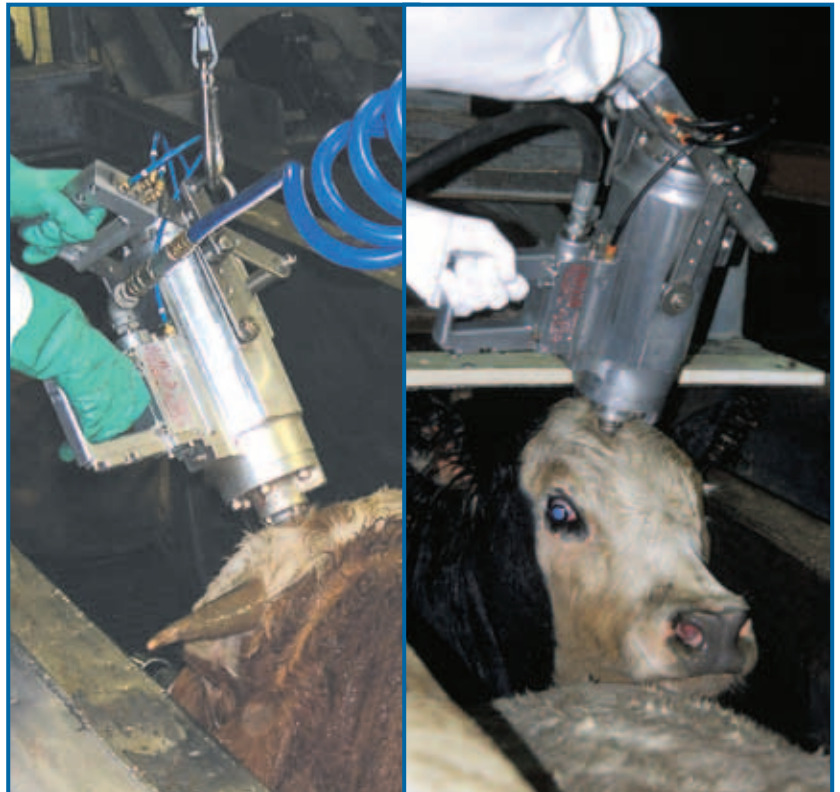

HUMANE - SAFE - EFFICIENT

PNEUMATIC STUNNER

Model USSS-1

Specifications

Drive	Pneumatic	
<hr/>		
Model USSS-1		
Operating Pressure (normal)	160 - 175 psi	11 - 12 bar
Operating Pressure (maximum)	250 psi	17.2 bar
Air Consumption @ 175 psi (12 bar)	1.45 ³	41L
Penetrating Shaft Diameter	0.625 in	15.9 mm
Control Handles		
Dual Triggers	Pneumatic	
Overall Dimensions (l x w x h)	19 x 5.5 x 15 in	483 x 140 x 381 mm
Weight (knocker box handles)	32.5 lbs	14.7 kg
Weight (restrainer handles)	34 lbs	15.4 kg

Equipment Selection and Accessories	Order Number
--	---------------------

Model USSS-1		
side handle for use in knocker box		4044004
Rear handle for use in "V" or center track restrainer		4044005
rear handle for use in knocker box		4044013
<hr/>		
Air Compressor	5 hp	10 hp
460 V / 60 Hz	4061361	4061366
380 V / 50 Hz	4061362	4061379
575 V / 60 Hz	4061363	4061382
380 V / 60 Hz	4061364	
415 V / 50 Hz	4061378	4061380
230 V / 60 Hz	4061376	
220 V / 50 Hz	4061377	
<hr/>		
Model AST-101 Pneumatic Stunner Tester (includes test stand and control box)		
	115 V, 60 Hz	4016004
	230 V, 50 / 60 Hz	4016005
<hr/>		
Air Filter-Regulator-Lubricator (64 oz / 1.9 L Capacity)		3022100
Air Hose Assembly (coiled, 25 ft/ 7.6 m)		3059045
Balancer		4042035



Products for the meat and poultry industry